

Remediation of Surface Water Contaminated with Domestic Purpose Kerosene Using Fenton's Oxidation

D. Y. Shinggu^{1*}, J. H. Kanus¹ and W. O. Medjor²

¹*Department of Chemistry, Nigerian Army University Biu, Borno State, Nigeria.*

²*Department of Chemistry, Taraba State University, Jalingo, Taraba State, Nigeria.*

Authors' contributions

This work was carried out in collaboration among all authors. Authors DYS, JHK and WOM designed the study, performed the statistical analysis, wrote the protocol and wrote the first draft of the manuscript. Authors DYS, JHK and WOM managed the analyses of the study. Authors DYS, JHK and WOM managed the literature searches. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/CSJI/2019/v28i130128

Editor(s):

(1) Dr. R. Rajalakshmi, Department of Chemistry, University Coimbatore, India.

Reviewers:

(1) Sainudeen Pattazhy, Kerala University, India.

(2) Vladimir Chobot, University of Vienna, Austria.

(3) Nwauche, Kelechi Thankgod, Rhema University, Nigeria.

Complete Peer review History: <http://www.sdiarticle3.com/review-history/50873>

Original Research Article

Received 17 June 2019
Accepted 20 August 2019
Published 02 September 2019

ABSTRACT

The remediation of surface water contaminated with domestic purpose kerosene (DPK) using Fenton's oxidation was investigated at ambient temperature for effectiveness at optimum conditions established. Results obtained from optimization studies for the Fenton's oxidation employed for the study were 250000 mg/L H₂O₂ and 300 mg/L FeSO₄ at ambient temperature with pH of samples adjusted to 3.0. At the end of the chemical remediation, the Fenton's oxidation was found to be rapid with the reaction being exothermic and followed second order kinetics. About 44.4% of the total petroleum hydrocarbon (TPH) as kerosene removal efficiency was achieved after 90 minutes. The reaction also followed a pseudo-first order kinetics with the rate constant of $3 \times 10^2 \text{ mol}^{-1} \text{ cm}^3 \text{ min}^{-1}$.

Keywords: Total Petroleum Hydrocarbon (TPH); contaminated surface water; chemical oxidation; Fenton's oxidation.

*Corresponding author: E-mail: shinggudy2@yahoo.co.uk;

1. INTRODUCTION

Hydrocarbons are heterogeneous group of organic substance that are primarily composed of carbon and hydrogen molecules [1,2]. They are quit abundant in modern society; and are used for different variety of multipurpose work. Petroleum and petrochemicals have been the driving force behind the economic development of many developing nations especially Nigeria. The world depends on petroleum and other fossil fuel with vast amount of which is used in transported, processed and stored around the world [3]. In 2003, the total world consumption of petroleum was over 13.1 billion liters per day. The United States energy information administration project in 2006 reported that the world consumption of petroleum will increase to 98.3 million barrels per day ($15.63 \times 10^6 \text{ m}^3 \text{ day}^{-1}$) in 2015 and 118 million barrels per day ($18.8 \times 10^6 \text{ m}^3 \text{ day}^{-1}$) in 2030. With such a large consumption of petroleum, oil spills are inevitable. The most notable oil spills at sea involve large tankers, which spilled thousands of tons of oil due to some human errors [4,5]. These oil spills can cause severe damage to soils, water bodies and other aquatic animals [6]. The apparent oil spillages occurring in Nigeria and other countries are considered forms of major pollution, having adverse effect on the environment when the occurrence is frequent. These oil spillages greatly affects plants and animals, especially aquatic animals, which may in turn sometimes lead to plants and animals species getting endangered [7,8]. A thick layer of oil inhibits the metabolism of plants and suffocates them to death. This destruction of plants affects the whole food web and decreases the natural habitats of numerous species [9]. The contamination of the environment with petroleum hydrocarbons provides serious problems for many developing countries especially Nigeria. Man has dealt with the cleanup of petroleum products contamination since the first day oil was discovered [10].

The development of petroleum industry into new frontiers, the apparent inevitable spillages that occur during routine operations, the records of acute accidents during transportation has called for more studies into oil pollution problems, which has been recognized as the most significant contamination problem encountered in Nigeria [11]. Thereafter, several studies have examined the fate and effect of petroleum in various ecosystems [12,13]. This work is aimed at investigating the effectiveness of Fenton's

oxidation in remediating a kerosene contaminated surface water to contribute to the numerous research works meant to create a convincing chemical remediation technique or method that can be employed to treat a water body when there is a case of oil spillage. This work also investigated the optimum conditions and kinetics needed for better performance of the method employed for the treatment of DPK contaminated surface water.

2. MATERIALS AND METHODS

All reagents used are of analar grade, the equipment used were washed and dried at appropriate temperatures.

2.1 Sampling Area and Sample Collection

River Bali is located in Bali local government area of Taraba State, Nigeria, with geographical coordinates of 7°52'0" North, 10°58'0" East.

The water samples were collected by grab sampling method along the bank of river Bali at different locations to make a representative sample. The water which flows through the Bali main bridge is sampled in a thoroughly washed 25 liter container rinsed with distilled water. A standard domestic purpose kerosene (DPK) Samples were obtained from the Nigeria National Petroleum Commission (NNPC) Filling station of Mile-six Jalingo, Taraba State, Nigeria.

2.2 Samples Homogenization

To provide a homogenized water sample and to enhance a thorough mixing of the DPK with the water, the water was thoroughly mixed by the use of mechanical shaker. Pollution was simulated in the laboratory by contaminating 45 cm^3 of the surface water sample with 5 cm^3 domestic purpose kerosene (DPK) in several different containers, stirred with magnetic stirrer to produce 10% contamination.

2.3 Quality Control

High quality grade n- hexane was used in extracting hydrocarbon from the contaminated surface water in preparing working standards used in constructing calibration curves. The dilute solutions of the analyte employed in the spectrophotometric measurements were homogeneously mixed and found not to associate or dissociate at the time of analysis. Reagent

blanks (analyte free water + treatment solutions to be analyzed) were used to correct any absorption of light by n-hexane. Quartz cuvettes free from scratches clean and dried before used [14].

2.4 Instrument Requirement

Different hydrocarbons in water shows absorbance at specific wavelengths. Spectrophotometric measurements gave satisfactory accuracy, sensitivity, reproducibility and linearity at different wavelengths. Stable electricity was ensured by via the use of electric generator and an uninterrupted power supply (UPS) device for reliable performance. In this study, a spectrophotometer was used in preference to a colorimeter to reduce the interference from unwanted chromogenes.

2.5 Optimization Studies

Optimization study for the concentrations of H_2O_2 , $FeSO_4$, pH, and temperature was carried out to determine the optimum conditions for the treatment of the DPK contaminated surface water. The same conditions were subsequently used for kinetic studies.

2.6 Optimum H_2O_2 Concentration

About 150 mg/L $FeSO_4$ was prepared and kept constant for the sake of the H_2O_2 optimization study. Several solutions of the 10% DPK contaminated surface water taken in ten different conical flasks which were each added 6 mL of 100 mg/L $FeSO_4$ and 30 mL of 50,000 –500,000 mg/L H_2O_2 and allowed to undergo remediation for 40 minutes before extraction and analysis. Kerosene in the water layers was extracted using n- hexane. Total Petroleum Hydrocarbon as kerosene was read by UV/Visible spectrophotometer at wavelength of 310 nm. The procedure was repeated for other replicate samples.

2.7 Optimum $FeSO_4$ Concentration

About 250,000 mgL^{-1} H_2O_2 was observed to be the optimum concentration for the treatment which was used to determine the optimum concentration of iron (II) sulphate. Several solutions of the 10% DPK contaminated surface water taken in eight conical flasks were each added 6 mL of 50-700 mg/L $FeSO_4$ and 30 mL of 250,000 mg/L H_2O_2 and allowed to undergo

remediation for 40 minutes before extraction and analysis using T – 60 UV/Visible spectrophotometer.

2.8 Optimum pH

The solution of the 10% DPK contaminated surface water was taken in twelve conical flasks. To each of the several solutions, 6 mL of 300 mg/L $FeSO_4$ and 30 mL of 250,000 mg/L H_2O_2 were added. Each of the solutions had their pH values varied between 1.5 to 7.0 pH values by the use of 1M H_2SO_4 and 1M $NaOH$ for adjustment, pH meter was used for measurement throughout the adjustment and the samples were allowed to run for 40 minutes before extraction and analysis.

2.9 Kinetics Studies

Optimum conditions obtained from the optimization study were applied in the kinetic study where aliquot was taken out for extraction and analyzed at time interval of 5, 10, 15, 30, 45, 60 and 90 minutes [14,15].

2.10 Fenton's Oxidation

The optimum conditions established from the optimization and kinetic studies 6 cm^3 of 300 mg/L $FeSO_4$, 30 cm^3 of 250,000 mg/L H_2O_2 , pH value of 3, were applied to the several solutions of 10% contamination in conical flasks, stirred with magnetic stirrer and kept for a required time until extraction and analysis. TPH concentration was determined by T-60 UV/Visible spectrophotometer at a wavelength of 310 following laboratory method adopted by [16,14].

2.11 Statistical Treatments

Samples were prepared in replicate of three to provide data for statistical treatment. Standard deviation (SDEV), relative standard deviation (RSD) and coefficient of variation (CV) calculations were used to checkmate indeterminate (random) error. Sets of replicate results obtained from the study were found to have measurement uncertainty of less than 2% in terms of their coefficient of variations in all cases.

Therefore the results are said to be of high precision. Blank runs were also conducted to reduce the occurrence of determinate errors [14].

3. RESULTS AND DISCUSSION

The efficiency of a remediation technology depends on several factors; pH, type of water, time, concentration of treatment solutions, nature of catalyst and competition between different pollutants [17]. Various experiments were designed to optimize Fenton's oxidation and to investigate the effect of these environmental factors on Fenton's oxidation [18,19]. The results on the optimization of hydrogen peroxide

concentration, iron sulphate concentration, pH, and temperature for DPK contaminated surface water samples treated by Fenton's oxidation are shown below. Optimum concentrations of 250,000 mg/L H_2O_2 and 300 mg/L $FeSO_4$ solutions were obtained for the kerosene contaminated surface water samples with an average 40.84% remediation efficiency with little or no significant difference. The results are shown in Figs. 1 and 2.

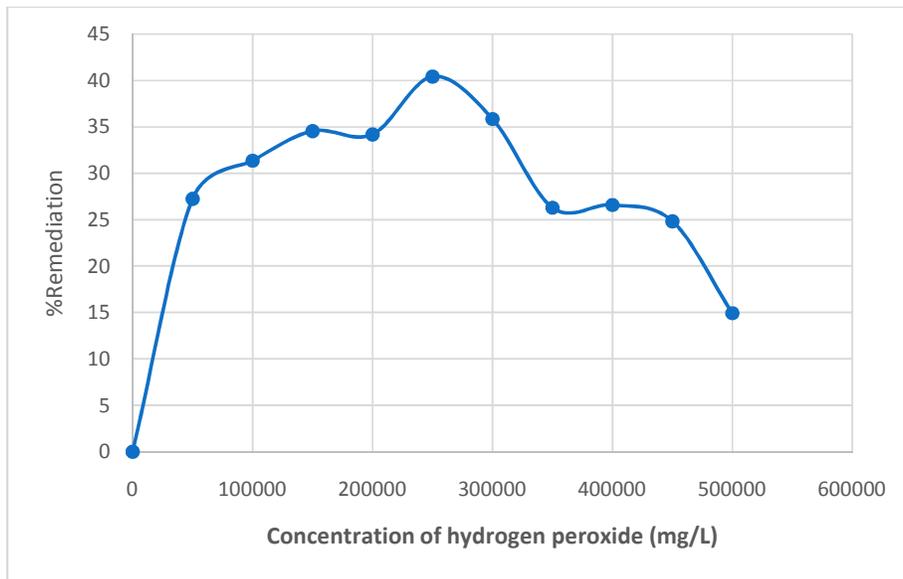


Fig. 1. Effect of H_2O_2 concentration on TPH removal efficiency

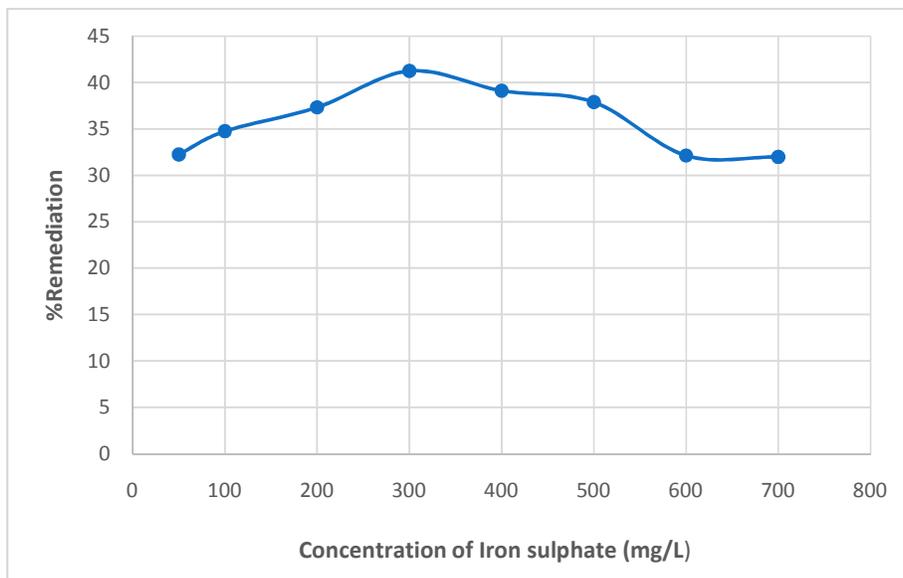


Fig. 2. Effect of $FeSO_4$ concentration on TPH removal efficiency

Studies found indifferent literatures suggested that the mixture of the hydrogen peroxide and iron (II) sulphate solutions is acidic in nature with an approximate pH value of 4.43, this value was confirmed and an optimum pH of 2.8-3.0 was obtained and ensured for efficiency of the Fenton's oxidation [17,20].

The results of the pH test condition demonstrated that the most effective removal was at pH 3 with percentage removal of 42.59%. The effect of pH seemed to be less effective in TPH removal at higher pH values. At lower pH values, the removal was quite high (pH: 2 = 35.6%, pH: 2.5 = 37.25%, pH: 3 = 42.59%). With increasing pH, the percentage TPH removal dropped linearly as shown in Fig. 3. The drop in efficiency on the basic side is attributed to the transition of iron from a hydrated ferrous ion to a colloidal ferric species [17]. In the latter form, iron catalytically decomposes the H₂O₂ into oxygen and water, without forming hydroxyl radicals. The drop in efficiency on the acid side is less dramatic given the logarithmic function of pH, and is generally a concern only with high application rates. The result shows that ferrous iron could react with H₂O₂ efficiently under acidic conditions [21]. Thus pH of 3 is the optimum for the DPK contaminated surface water treated by Fenton oxidation.

Optimum temperature range of 25 – 30°C was obtained; this is in agreement with other studies found in literature. The rate of reaction with

Fenton's reagent increases with increase in temperature, with the effect more pronounced at the range of 25 to 30°C. However, as the temperatures increase above 40°C, statistically there was a significant change as the efficiency of Fenton's oxidation declines. This is due to the accelerated decomposition of H₂O₂ into water and oxygen [17,22]. This discussion is illustrated in Fig. 4.

The effect of reaction time on Fenton's oxidation of surface water contaminated with domestic purpose kerosene was tested based on the optimum conditions established earlier. It was found that the rate of TPH removal increased from the initial time of 5mins to 10mins. There was increase in time until about 45 minutes where the removal rate became steep and steady with gradual increase from 60 to 120 minutes. Appreciable TPH removal percentage was achieved within 90 minutes of reaction time. A plot of TPH left against time represented in Fig. 5, gave a reciprocal relationship between TPH left and time of reaction, which clearly indicate a reduction in TPH concentration with time.

The result obtained from the kinetic study, showed that surface water contaminated with kerosene gave appreciable TPH removal of 44.4% when the reaction was allowed to run for 90mins. A graph of percentage remediation against reaction time was plotted to illustrate this. This is shown in Fig. 6.

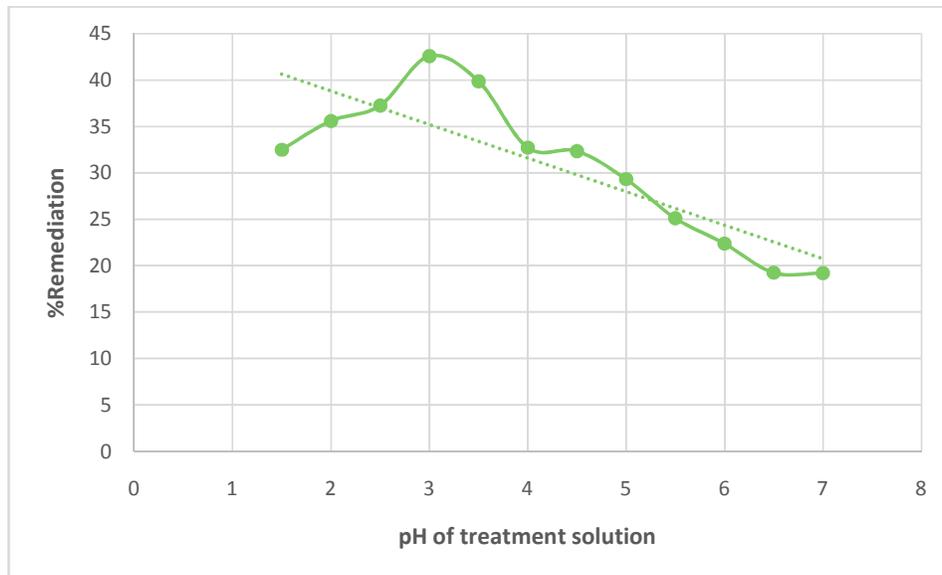


Fig. 3. Effect of pH on TPH removal efficiency

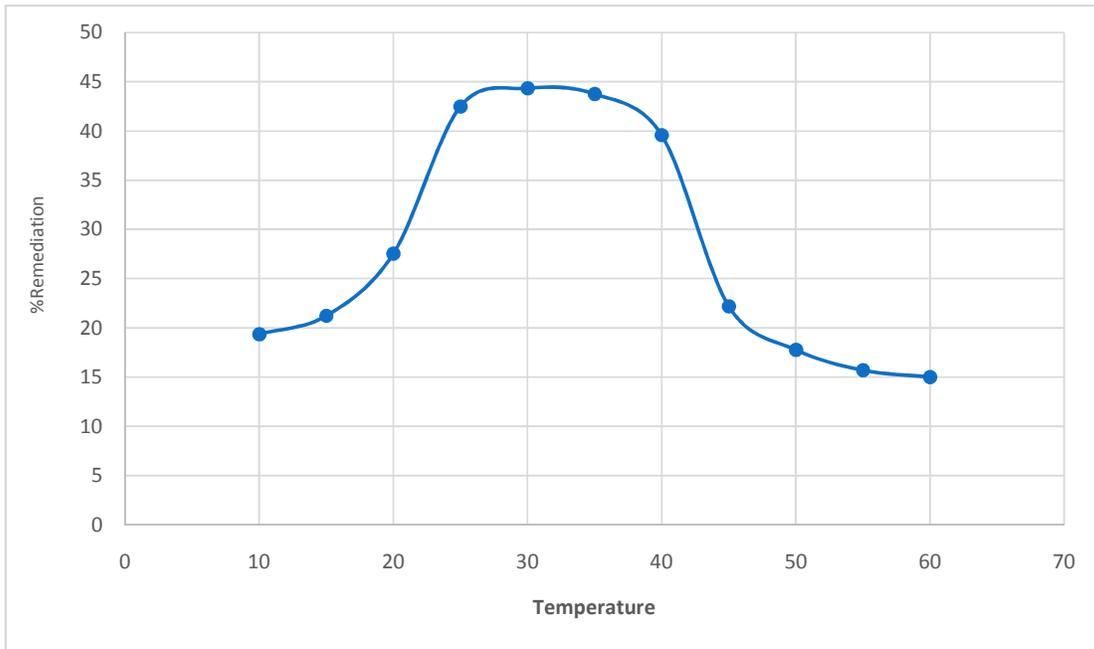


Fig. 4. Effect of temperature on TPH removal efficiency

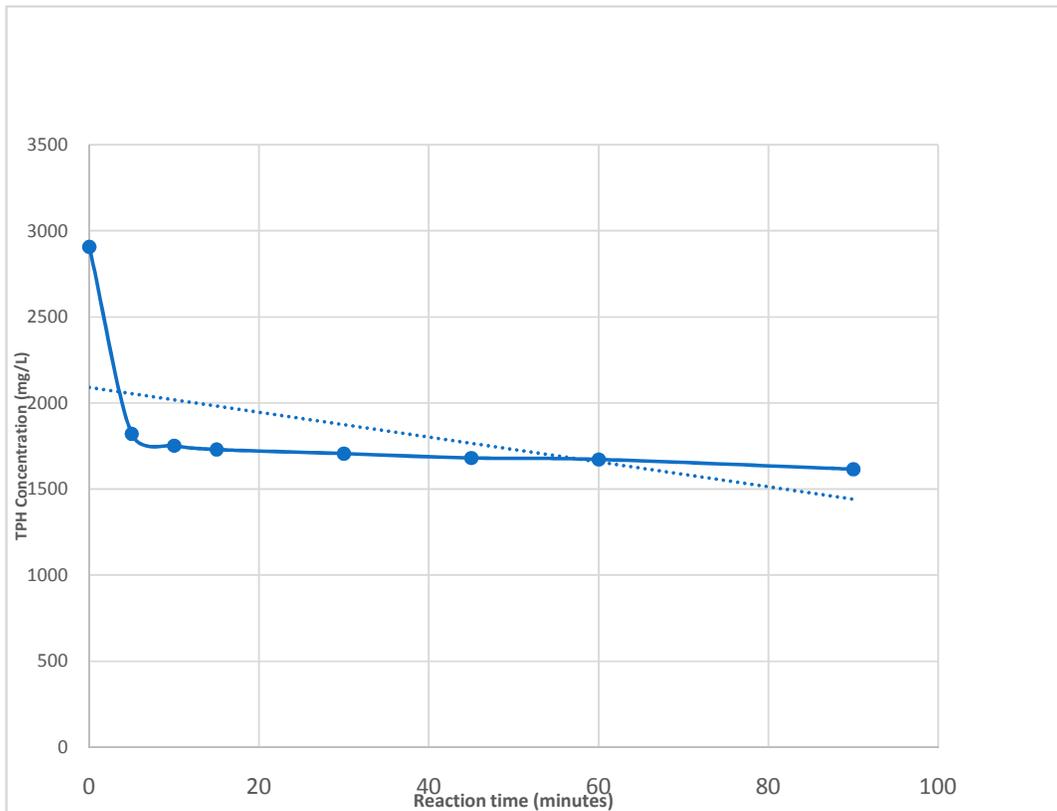


Fig. 5. TPH left after remediation with different reaction time

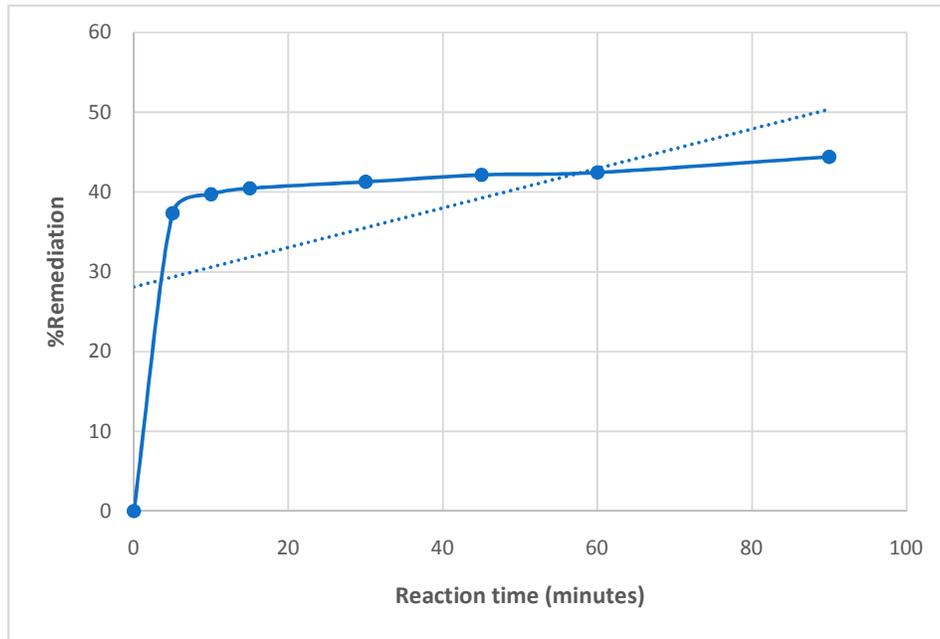


Fig. 6. Percentage remediation against reaction time

The equation $\ln[B]_0 - [B]_t = kt$ against Time, establishes the relationship between TPH concentration and time for a second order kinetics as represented in Fig. 7. The plot is of

good linearity, which shows that the obtained data fits into a Pseudo-first order kinetics. This is illustrated below:

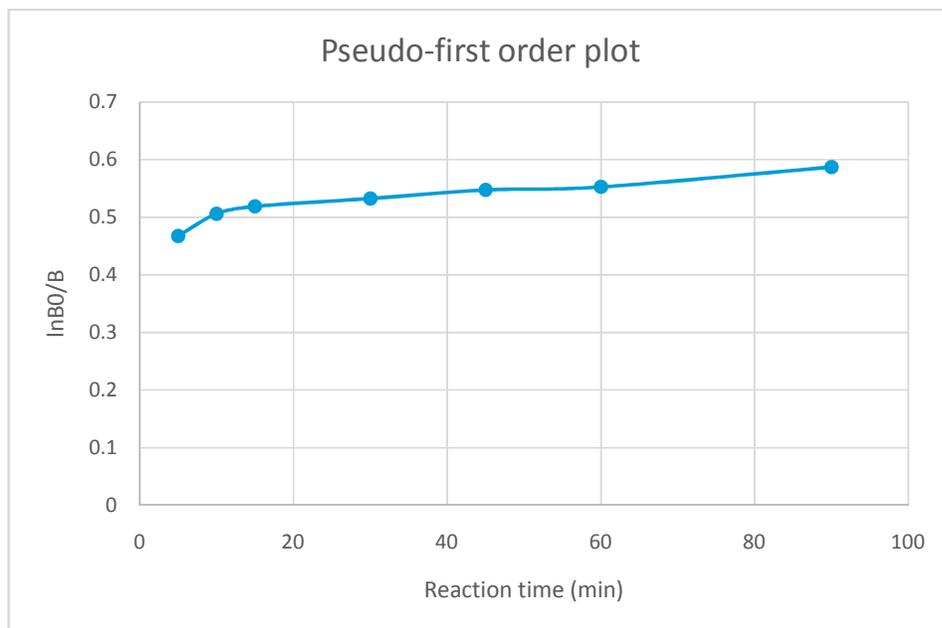


Fig. 7. Second order reaction kinetics (Pseudo – first order plot)

The rate constant of the Fenton's oxidation used in the remediation of kerosene contaminated surface water samples was obtained from its second order reaction kinetics plot (pseudo-first order plot) as $3 \times 10^2 \text{ mol}^{-1} \text{ cm}^3 \text{ min}^{-1}$. The half-life of second-order reaction kinetics which is inversely proportional to the initial total petroleum hydrocarbon concentration ($t_{1/2} = 1/k_{[\text{initial TPH}]}$) was calculated as 1.146×10^{-6} minutes. This shows that the half-life was shorter in the early stage of the reaction when more of the reactant molecules were present.

4. CONCLUSION

The results obtained from this have shown that Fenton's oxidation is an efficient technique in remediating DPK contaminated surface water. The study has revealed that various factors such pH, type of water, type of hydrocarbon, H_2O_2 concentration, FeSO_4 concentration, temperature and reaction time can affect the efficiency of Fenton's oxidation.

Fenton's oxidation was found to be more effective in acidic environment than in basic environment. This suggest that the environment to be treated must be slightly acidic before treatment. The environment must also not be too acidic as H^+ would compete with contaminants for OH^- radicals.

DPK polluted surface water remediated by Fenton's oxidation may need post-treatment to improve on its portability for industrial, domestic and agricultural uses.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Phelelani PM. Remediation of soil and water contaminated by heavy metals and hydrocarbons using silica encapsulation. University of the Witwatersrand, Johannesburg; 2007. Available:<http://wiredspace.wits.ac.za/bitstream/handle/10539/5818/Phele%20dissertation.pdf>
2. Wang Z, Fingas M, Blenkinsopp S, Sergy G, Landriault M. et al. Comparison of oil composition changes due to biodegradation and physical weathering in different soils. *J. Chromatography. A.*, 1998;809:89-107.
3. Jain PK, Gupta VK, Gaur RK, Lowry M, Jaroli DP, Chauhan UK. Bioremediation of petroleum oil contaminated soil and water. *Research Journal of Environmental Toxicology.* 2011;5:1-26.
4. Paine R, Ruesink J, Sun A, Soulanille E, Wonham M, et al. Trouble on oiled waters: Lessons from the Exxon Valdes oil spill. *Annu. Rev. Ecol. Syst.* 1996;27:197-235.
5. Albaiges J, Morales-Nin B, Vilas F. The prestige oil spill: A scientific response. *Mar. Pollut. Bull.* 2006;53:205-207.
6. Whitfield J. How to clean a beach. *Nature.* 2003;422:464-466.
7. Wells O. Oil and sea birds- the imperative for preventing and reducing the continued illegal oiling of the seas by ships. *Mar. Pollut. Bull.* 2001;42:251-252.
8. Edewor TL, Adelewo OO, Afolabi TJ. Preliminary studies into the biological activities of a broad spectrum disinfectant formulated from used engine oil. *Poll. Res.* 2004;234:581-586.
9. HELMCOM. The Baltic marine environment 1999-2002. *Baltic Sea Environment Proceedings*, 87, Helsinki Commission. Baltic Marine Environment Protection Commission; 2003.
10. EPA. Understanding oil spills and oil spills response. Environmental Protection Agency, Washington Dc, USA; 1999.
11. Snape I, Riddle MJ, Stark JS, Cole CM, King CK, Duquesne S, Gore DB. Management and remediation of contaminated sites at Casey station. *Antarctica Poll and Record.* 2001;37:199-214.
12. Boehm PD, Douglas GS, Brown JS. Advanced chemical finger print for oil spill identification and natural resources damage assessments. *Proceedings of the oil spill conference, (OSC95)*, API, Washington Dc. 1995;373-379.
13. Whittaker MS, Pollard TT, Ridsen G. The fate of heavy oil Wastes in soil microcosms H: A performance assessment of source correlation indices. *Sci. Total Environ.* 1999;226:23-34.
14. Medjor WO, Egharevba F, Akpoveta VO, Ize-Iyamu OK, Jatto EO. Remediation of crude-oil contaminated groundwater by Fenton-Oxidative method. *International Journal of Environmental Sciences.* 2012; 2(3):1398-1407,
15. EPA. Kinetics of Fenton reagent on contaminant of common concern; 2000.

16. Pignatello JJ, Oliveros E, Mackay A. Advanced oxidation processes for organic contaminant destruction based on the Fenton reaction and related chemistry. *Crit. Rev. Env. Sci. Technol.* 2006;36:1-84.
17. Sylvia A. Remediation of petroleum hydrocarbons contaminated soil by Fenton's oxidation. *Journal of Environmental Science and Public Health.* 2018;2:168-178.
18. Bishop DF, et al. Hydrogen peroxide catalytic oxidation of refractory organics in municipal waste waters. In *Ind. Eng. Chem., Process Design & Development.* 1968;7:1110-117.
19. Bautista P, Mohedano AF, Casas JA, Zazo JA, Rodriguez JJ. An overview of the application of Fenton oxidation to industrial waste water treatment. *J. Chem. Technol. Biotechnol.* 2008;83:1323-1338.
20. Medjor, et al. Optimization, kinetics, physicochemical and ecotoxicity studies of Fenton oxidative remediation of hydrocarbons contaminated groundwater, Egypt. *J. Petrol.* 2017. Available:<http://dx.doi.org/10.1016/j.ejpe.2017.07.001>
21. Peroxide US. Fenton's reagent general chemistry, Hydrogen peroxide; 2013. Available:<http://www.usperoxide.com/technologiesforcleanenvironment> (Accessed November, 2018)
22. Huang CP, Dong C, Tang Z. Advanced chemical oxidation: its present role and potential future hazard. *Waste Management. Linger lessons of Exxon Valdez oil spill.* 1993;13:361-377. Available:Comondreams.org.2004-03-22 [Retrieved 2013-06-10]

© 2019 Shinggu et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
The peer review history for this paper can be accessed here:
<http://www.sdiarticle3.com/review-history/50873>